

A SEMI-ANALYTICAL COMPUTATION OF THE KELVIN KERNEL FOR POTENTIAL FLOWS WITH A FREE SURFACE

JORGE D'ELÍA^{1*}, LAURA BATTAGLIA^{1*} AND MARIO STORTI^{1*}

¹ Centro Internacional de Métodos Computacionales en Ingeniería (CIMEC)
Instituto de Desarrollo Tecnológico para la Industria Química (INTEC)
Universidad Nacional del Litoral - CONICET
Güemes 3450, 3000-Santa Fe, Argentina

E-mails: jdedia@intec.unl.edu.ar, lbattaglia@santafe-conicet.gob.ar,
mstorti@intec.unl.edu.ar, web page: <http://www.cimec.org.ar>

ABSTRACT. A semi-analytical computation of the three dimensional Green function for seakeeping flow problems is proposed. A potential flow model is assumed with an harmonic dependence in time and a linearized free-surface boundary condition. The multiplicative Green function is expressed as the product of a time and a spatial parts. The spatial part is known as the Kelvin kernel, which is the sum of two Rankine sources and a wave-like kernel, being the last one written using the Haskind-Havelock representation. Numerical efficiency is improved by an analytical integration of the two Rankine kernels and the use of a singularity subtractive technique for the Haskind-Havelock integral, where a globally adaptive quadrature is performed for the regular part and an analytic integration is used for the singular one. The proposed computation is employed in a low order panel method with flat triangular elements. As a numerical example, an oscillating floating unit hemisphere in heave and surge modes is considered, where analytical and semi-analytical solutions are taken as a reference.

Mathematical subject classification: Primary: 33F05; Secondary: 65N38.

*Consejo Nacional de Investigaciones Científicas y Técnicas (CONICET): PIP 5271-05.

Universidad Nacional del Litoral (UNL): CAI+D 2009-III-4-2.

Agencia Nacional de Promoción Científica y Tecnológica (ANPCyT): PICT 1506-06, PICT 1141-07 and PAE 22592-04 nodo 22961.

Key words: Green function, boundary integral equation, three dimensional potential flow, free surface, computational techniques.

1. INTRODUCTION

In seakeeping flow problems for ship hydrodynamics, a rigid body placed on the free surface of an incompressible inviscid fluid can oscillate in any of the six degrees of freedom around its mean position due to a passing front wave [1]. The standard potential flow theory assumes that the motion is relatively small and harmonic in time [2, 3].

The classical analysis with a linearized free-surface boundary condition splits the problem in seven parts. First, six radiative modal potentials $\Phi_k(\mathbf{x}, t)$ have to be determined, for $k = 1, 2, \dots, 6$, where the rigid body performs imposed small harmonic oscillations in each degree of freedom. Next, a diffraction potential $\Phi_7(\mathbf{x}, t)$, due to a passing harmonic monochromatic wave of small amplitude, has to be found, where \mathbf{x} is the position vector and t is the time. These modal velocity potentials $\Phi_k(x, y, z, t)$, for $k = 1, 2, \dots, 7$, are found by solving seven boundary integral equations, where the left hand sides have the same integral operator and only the independent terms are specific for each mode, e.g. see [4].

As it is well known, boundary element methods, or panel methods [5], are a natural choice for obtaining numerical solutions of boundary integral equations [6] through collocation or Galerkin techniques [7], as well as they are closely related to the Green function theory [8].

The Green function $\hat{G}(\mathbf{x}, t)$ for seakeeping is expressed as the product of a time factor $T(t)$ and a spatial $G(\mathbf{x})$ one. As the incident front wave is assumed as monochromatic in time, with absolute circular frequency ω , then, the time factor takes the simple form $T(t) = e^{i\omega t}$, and all computations can be performed in the frequency domain. The spatial part of the Green function $G(\mathbf{x})$ is also known as the Kelvin kernel which, in turn, is decomposed in the sum of two Rankine ones and a wave-like kernel. Both Kelvin and Rankine kernels

are widely used in numerical ship hydrodynamics although neither of them satisfy the slip boundary condition over the wetted hull surface and, consequently, it must be enforced for a numerical computation.

On one hand, the Rankine kernel has rather simple mathematical properties, however, it does not satisfy neither the outgoing radiation nor the free-surface boundary conditions. Thus, a finite portion of the free surface must be also discretized in order to impose these missing properties. Aside of these drawbacks, a great advantage of the Rankine kernel appears in unsteady potential flow problems with non-linear boundary conditions [9, 10].

On other hand, the use of the Kelvin kernel avoids the discretization of the free surface, and the outgoing radiation boundary condition is automatically satisfied. However, it involves several mathematical expressions rather elaborated and tends to be ill-conditioned for field points nearby the axisymmetric axis of the local cylindrical frame at each panel, which is a serious numerical drawback, particularly in hull meshes with relatively high number of panels.

In this work, a computation of the Kelvin kernel is proposed through a singularity subtraction technique, where the boundary integral is split in the sum of a regular term and a singular one. For the regular term, a globally adaptive numerical quadrature is employed, while an analytic integration is performed for the singular one. The proposed computation is used with a low order panel method where only the hydrostatic wetted body surface is discretized with flat triangles. As a numerical example, the oscillating floating unit hemisphere in heave and surge modes is considered, where analytical and semi-analytical solutions are available.

2. SEAKEEPING FLOW PROBLEM

2.1. Differential formulation. A Cartesian (x, y, z) coordinate system is chosen, where the plane $z = 0$ matches the still water plane and the z -axis is positive upwards. The complex time dependency $e^{i\omega t}$ is implicitly assumed, where ω is the circular frequency of the periodic motion.

An infinitesimal rigid body oscillating in the k degree of freedom and placed under the free surface of a fluid without a uniform mean current, is described with the linearized governing equation [11]

$$(1) \quad \begin{aligned} \Delta\phi_k &= 0 && \text{for } z < 0; \\ \partial_z\phi_k &= K\phi_k && \text{at } z = 0; \\ \phi_k &= O(|\mathbf{x}|^{-1}) && \text{for } |\mathbf{x}| \rightarrow \infty; \end{aligned}$$

where $\Delta = \partial_{xx} + \partial_{yy} + \partial_{zz}$ is three-dimensional Laplacian operator, ϕ_k is the k -modal radiation potential, and $K = \omega^2/g$ is the wave-number for gravity waves in deep water.

2.2. Boundary integral equation. A boundary integral equation for solving Eq. (1) is given by [2]

$$(2) \quad \frac{1}{2}\phi_k(\mathbf{x}) + \frac{1}{4\pi} \int_S dS_{\boldsymbol{\xi}} G_{,n}(\mathbf{x}, \boldsymbol{\xi})\phi_k(\boldsymbol{\xi}) = Q_k(\mathbf{x}) ;$$

for $\mathbf{x} \in S$, where \mathbf{x} and $\boldsymbol{\xi}$ are the field and source points, respectively, and S is the boundary of the flow domain Ω . The independent term is

$$(3) \quad Q_k(\mathbf{x}) = \frac{1}{4\pi} \int_S dS_{\boldsymbol{\xi}} G(\mathbf{x}, \boldsymbol{\xi})\sigma_k(\boldsymbol{\xi}) ;$$

while $\phi_k(\mathbf{x})$, for $k = 1, \dots, 6$, is the k -radiation velocity potential, and σ_k are known fluxes. A standard panel method imposes the integral boundary equation (2) by means of a collocation technique at the panel centroids, obtaining a complex valued linear system $\mathbf{A}\boldsymbol{\phi}_k = \mathbf{C}\boldsymbol{\sigma}_k = \mathbf{b}_k$, where $\boldsymbol{\phi}_k$ is the k -velocity potential vector, and $\boldsymbol{\sigma}_k$ is the k -flux vector corresponding to the k -mode. The dipolar matrix, which is non-symmetric and regular, is given by

$$(4) \quad A_{ij} = \frac{1}{4\pi} \int_S dS_{\boldsymbol{\xi}} G_{,n}(\mathbf{x}, \boldsymbol{\xi}) ;$$

and the monopolar one, symmetric, is

$$(5) \quad C_{ij} = \frac{1}{4\pi} \int_S dS_{\boldsymbol{\xi}} G(\mathbf{x}, \boldsymbol{\xi}) .$$

Both monopolar \mathbf{C} and dipolar \mathbf{A} matrices are square and full populated. They include the spatial Green function $G(\mathbf{x}, \boldsymbol{\xi})$ and the normal derivative $G_{,n}(\mathbf{x}, \boldsymbol{\xi})$, respectively.

2.3. Kelvin and Rankine kernels in the spatial Green function. The spatial Green function $G(\mathbf{x}, \boldsymbol{\xi})$ in Eq. (5), that satisfies Eq. (1), is known as the Kelvin kernel, which gives the interaction between the field point $\mathbf{x} = (x, y, z)$ and the source point $\boldsymbol{\xi} = (\xi, \eta, \zeta)$ [12]. The physical meaning of the Green function is given by the real part $\text{Re}\{Ge^{i\omega t}\}$, which is the disturbed velocity potential measured at the field point \mathbf{x} , at time t , and caused by a pulsating source $\boldsymbol{\xi}$ of circular frequency ω and unit intensity [1]. It should be noted that the outgoing radiation and free surface boundary conditions are automatically satisfied by the Kelvin kernel.

Due to the local axisymmetry around the source point $\boldsymbol{\xi}$, it is convenient to introduce the non-dimensional cylindrical coordinates

$$(6) \quad \begin{aligned} X &= K\{(x - \xi)^2 + (y - \eta)^2\}^{1/2} ; \\ Y &= K|z + \zeta| ; \end{aligned}$$

where X is the radial coordinate and Y the vertical one. Then, the Kelvin kernel for seakeeping is written as

$$(7) \quad G = r^{-1} + s^{-1} + \tilde{G} ;$$

where

$$(8) \quad r, s = \{(x - \xi)^2 + (y - \eta)^2 + (z \mp \zeta)^2\}^{1/2} ;$$

are the Euclidean distances between the field point \mathbf{x} and the source point $\boldsymbol{\xi}$, and between the field point \mathbf{x} and the image point $\boldsymbol{\xi}' = (\xi, \eta, -\zeta)$, respectively. The first two terms r^{-1} and s^{-1} in Eq. (7) are the Rankine kernels, while the \tilde{G} term inherits the spatial wave properties of the Kelvin one and, then, it is termed the “wave-kernel”.

2.4. Haskind-Havelock representation of the wave-kernel. The wave kernel \tilde{G} involves several transcendental functions and, consequently, the computational cost can be rather expensive. Moreover, the Haskind-Havelock representation tends to be ill-conditioned for

field points located near the axisymmetric axis, as well as for far away regions. Thus, a semi-analytical integration strategy is proposed as a compromise solution between numerical cost and complicated mathematical expressions, specially in numerical simulations with non-linear boundary conditions, e.g. when there is a mesh motion and the Jacobian of the system matrix is required.

The Haskind-Havelock representation for the wave part of the Kelvin kernel is written as [12]

$$(9) \quad \tilde{G}(X, Y) = -\pi K e^{-Y} [H_0(X) + Y_0(X) + P_0(X, Y) + 2iJ_0(X)] ;$$

where $H_0(X)$ is the Struve function of zero order, $J_0(X)$ and $Y_0(X)$ are the Bessel functions of zero order and first and second kind, respectively [13], and $P_0(X, Y)$ is the Haskind-Havelock integral [12]

$$(10) \quad P_0(X, Y) = \frac{2}{\pi} \int_0^Y d\alpha \frac{e^\alpha}{\sqrt{\alpha^2 + X^2}} .$$

The asymptotic behavior of the Kelvin kernel given by Eq. (7), at very low and very high frequencies, is derived in Sec. 4.2 and 4.3.

3. EVALUATION OF THE KELVIN KERNEL

3.1. Rankine kernels. The Rankine kernels r^{-1} and s^{-1} can be evaluated in several ways. One possibility is a numerical integration, which has the advantage that high order distributions can be considered without further complications although it is rather sensitive to the mesh quality and, moreover, the diagonal terms deserve a special treatment. Another alternative is an analytic integration, where the surface integral over each panel is replaced by its closed contour integration and a side local frame is used for each side contribution [14, 15, 16].

3.2. Normal derivative of the Haskind-Havelock kernel. The normal derivative of the Haskind-Havelock kernel is found from $\tilde{G}_{,n} = (\nabla_{\boldsymbol{\xi}} \tilde{G}, \mathbf{n}_{\boldsymbol{\xi}})$, where $\mathbf{n}_{\boldsymbol{\xi}} = (n_{\xi}, n_{\eta}, n_{\zeta})$ is the unit normal of $dS_{\boldsymbol{\xi}}$ and $\nabla_{\boldsymbol{\xi}} \tilde{G} = (\tilde{G}_{,\xi}, \tilde{G}_{,\eta}, \tilde{G}_{,\zeta})$ is the gradient of G , both evaluated on the

source point $\boldsymbol{\xi} = (\xi, \eta, \zeta)$. By the chain rule in Eqs. (6) and (9)

$$(11) \quad \begin{aligned} \tilde{G}_{,\xi} &= \tilde{G}_{,X} X_{,\xi} ; \\ \tilde{G}_{,\eta} &= \tilde{G}_{,X} X_{,\eta} ; \\ \tilde{G}_{,\zeta} &= \tilde{G}_{,Y} Y_{,\zeta} ; \end{aligned}$$

where

$$(12) \quad \begin{aligned} X_{,\xi} &= -K^2(x - \xi)/X ; \\ X_{,\eta} &= -K^2(y - \eta)/X ; \\ Y_{,\zeta} &= K \text{sign}(z + \zeta) . \end{aligned}$$

Note that the gradients of the wave-kernel of the Green function, evaluated in the field point $\mathbf{x} = (x, y, z)$ and the source point $\boldsymbol{\xi} = (\xi, \eta, \zeta)$ are linked as

$$(13) \quad (\tilde{G}_{,\xi}, \tilde{G}_{,\eta}, \tilde{G}_{,\zeta}) = (-\tilde{G}_{,x}, -\tilde{G}_{,y}, \tilde{G}_{,z}) .$$

The complex kernel is

$$(14) \quad \tilde{G} = \tilde{G}' + i\tilde{G}'' ;$$

where the real part, $\text{Re}\{..\} \equiv (..)'$, and the imaginary one, $\text{Im}\{..\} \equiv (..)''$, are given by

$$(15) \quad \begin{aligned} \tilde{G}' &= -\lambda(H_0 + Y_0 + P_0) ; \\ \tilde{G}'' &= -\lambda(2J_0) ; \\ \lambda &= \pi K e^{-Y} . \end{aligned}$$

The partial derivatives of \tilde{G}' are

$$(16) \quad \begin{aligned} \tilde{G}'_{,X} &= -\lambda(H_{0,X} + Y_{0,X} + P_{0,X}) ; \\ \tilde{G}'_{,Y} &= -\tilde{G}' - P_{0,Y} . \end{aligned}$$

3.3. Ill-conditioning of the Haskind-Havelock kernel. The Haskind-Havelock finite integral is given by

$$(17) \quad P_0 = \frac{2}{\pi} \int_0^Y d\alpha \frac{e^\alpha}{(\alpha^2 + X^2)^{1/2}} ;$$

and its partial derivatives are

$$(18) \quad P_{0,X} = -\frac{2}{\pi} X \int_0^Y d\alpha \frac{e^\alpha}{(\alpha^2 + X^2)^{3/2}} ;$$

$$(19) \quad P_{0,Y} = \frac{2}{\pi} e^Y (Y^2 + X^2)^{-1/2} .$$

The Haskind-Havelock finite integral P_0 evaluated at $t = 0$ tends to be ill-conditioned when $X \ll 1$, that is, for field points near the axisymmetric axis. This is a serious numerical drawback, in particular in hull meshes with high number of panels. For overcoming this disadvantage, a singularity substraction technique is proposed, where the integral is split in the sum of a regular term and a singular one. For the regular term, a globally adaptive numerical quadrature is employed, while an analytic integration is performed for the singular one. On the other hand, a direct computation of the Struve functions H_0 and J_0 can be performed through their definitions and asymptotic expansions.

4. SEMI-ANALYTICAL COMPUTATION OF THE HASKIND-HAVELOCK KERNEL

4.1. Singularity substraction technique. The Haskind-Havelock integral given by Eq. (17) is split in the sum of a regular term and a singular one. For the regular term, a globally adaptive numerical integration can be used, while an analytic integration is performed for the singular one. Thus, Eq. (17) is rewritten as

$$(20) \quad P_0 = \frac{2}{\pi} (\hat{P}_0 + \tilde{P}_0) ;$$

where

$$(21) \quad \hat{P}_0 = \int_0^Y d\alpha \frac{e^\alpha - 1}{(\alpha^2 + X^2)^{1/2}} ;$$

is a regular integral which can be evaluated accurately by a globally adaptive integration, for example, the `qag` routines of the `Netlib`

Repository (<http://www.netlib.org>). The remaining integral

$$(22) \quad \tilde{P}_0 = \int_0^Y d\alpha \frac{1}{(\alpha^2 + X^2)^{1/2}} ;$$

contains a logarithmic singularity when $X = 0$, and it is ill-conditioned when $X \rightarrow 0$. Then, it is evaluated in a closed form by performing the following variable changes

$$(23) \quad \begin{aligned} \alpha &= X \sinh(\theta) & ; \\ d\alpha &= X \cosh(\theta) d\theta & ; \\ (\alpha^2 + X^2)^{1/2} &= X \cosh(\theta) & ; \end{aligned}$$

for which

$$(24) \quad \begin{aligned} \alpha_1 = 0 &\rightarrow \theta_1 = 0 & ; \\ \alpha_2 = Y &\rightarrow \theta_2 = \sinh^{-1}(Y/X) & ; \end{aligned}$$

then

$$(25) \quad \tilde{P}_0 = \int_0^{\theta_2} d\theta = \sinh^{-1}(Y/X) .$$

The partial X -derivative of Eq. (20) is similarly decoupled as

$$(26) \quad P_{0,X} = \frac{2}{\pi} (\hat{P}_{0,X} + \tilde{P}_{0,X}) ;$$

where

$$(27) \quad \hat{P}_{0,X} = -X \int_0^Y d\alpha \frac{e^\alpha - (1 + \alpha + \alpha^2/2)}{(\alpha^2 + X^2)^{3/2}} ;$$

is a regular integral, whereas

$$(28) \quad \tilde{P}_{0,X} = -X \int_0^Y d\alpha \frac{1 + \alpha + \alpha^2/2}{(\alpha^2 + X^2)^{3/2}} ;$$

is the integral that contains the singularity and it is computed in closed form. The variable change $\alpha = X \sinh \theta$ is introduced again and

$$(29) \quad \tilde{P}_{0,X} = \int_0^{\theta_2} d\theta \frac{-1 - X \sinh \theta - X^2/2 \sinh^2 \theta}{X \cosh^2 \theta} .$$

As $\cosh^2 \theta - \sinh^2 \theta = 1$, then

$$(30) \quad \tilde{P}_{0,X} = \frac{X^2/2 - 1}{X}A - \frac{1}{X}B - \frac{X}{2}C .$$

The A term is given by

$$(31) \quad A = \int_0^{\theta_2} \frac{d\theta}{\cosh^2 \theta} ;$$

with the variable change

$$(32) \quad \begin{aligned} v = e^\theta &\rightarrow d\theta = dv/v ; \\ \cosh^2 \theta &= (v + v^{-1})^2/4 . \end{aligned}$$

Replacing

$$(33) \quad A = \int_0^{\theta_2} \frac{4v dv}{(v^2 + 1)^2} = \frac{-2}{v^2 + 1} \Big|_0^{\theta_2} ;$$

and then

$$(34) \quad A = 1 - \frac{e^{-\theta_2}}{\cosh \theta_2} .$$

Next, the B term is given by

$$(35) \quad B = \int_0^{\theta_2} \frac{X \sinh \theta d\theta}{\cosh^2 \theta} ;$$

introducing the variable changes

$$(36) \quad \begin{aligned} u = \cosh \theta &\quad ; \quad du = X \sinh \theta d\theta ; \\ \alpha = X \sinh \theta &\quad ; \quad u = (X^2 + \alpha^2)^{1/2} ; \end{aligned}$$

for which

$$(37) \quad \begin{aligned} \alpha_1 = 0 &\rightarrow u_1 = X && ; \\ \alpha_2 = Y &\rightarrow u_2 = (X^2 + Y^2)^{1/2} && ; \end{aligned}$$

it results

$$(38) \quad B = X - X^2(X^2 + Y^2)^{-1/2} .$$

Finally, the trivial C term is

$$(39) \quad C = \theta_2 = \sinh^{-1}(Y/X) .$$

However, when the field point $\mathbf{x} = (x, y, z)$ is on the axisymmetric axis of the source point $\boldsymbol{\xi} = (\xi, \eta, \zeta)$, then $X = 0$ and these expressions are not applicable. In such case, the asymptotic representation [11]

$$(40) \quad \tilde{G}(X, Y) = 2 \sum_{k=0}^{\infty} W^k(X, Y) - 2\pi i J_0(X) ;$$

can be used when $X \ll 1$, where

$$(41) \quad W^k(X, Y) = \frac{(-X^2/4)^k}{(k!)^2} b_k ;$$

with

$$(42) \quad b_k = \sum_{j=0}^{2k} \frac{(j-1)! (j-1)}{Y^j} \frac{(j-1)}{Y^j} - e^{-Y} \text{Ei}(Y) \quad \text{for } X \ll 1 ;$$

where $\text{Ei}(Y)$ is the exponential integral [13]. Then

$$(43) \quad \tilde{G} = 2W_0 + 2 \sum_{k=1}^{\infty} W^k(X, Y) - 2\pi i J_0(X) ;$$

that is

$$(44) \quad \tilde{G} = -2\text{Ei}(Y) + 2 \sum_{k=1}^{\infty} W^k(X, Y) - 2\pi i J_0(X) ;$$

which is valid for $X \ll 1$. As $W^k(X, Y)$ and its derivatives tend uniformly to zero in a small neighborhood of $X = 0$, then, Eq. (44) can be written as

$$(45) \quad \begin{aligned} \tilde{G} &= -\lambda[\text{Ei}(Y) + \pi i J_0(X)] ; \\ \tilde{G}_{,X} &= -\lambda[\text{Ei}(Y) - \pi i J_1(X)] ; \\ \tilde{G}_{,Y} &= -\tilde{G} - \lambda e^Y / Y ; \end{aligned}$$

at $X = 0$, where λ was defined in Eq. (15).

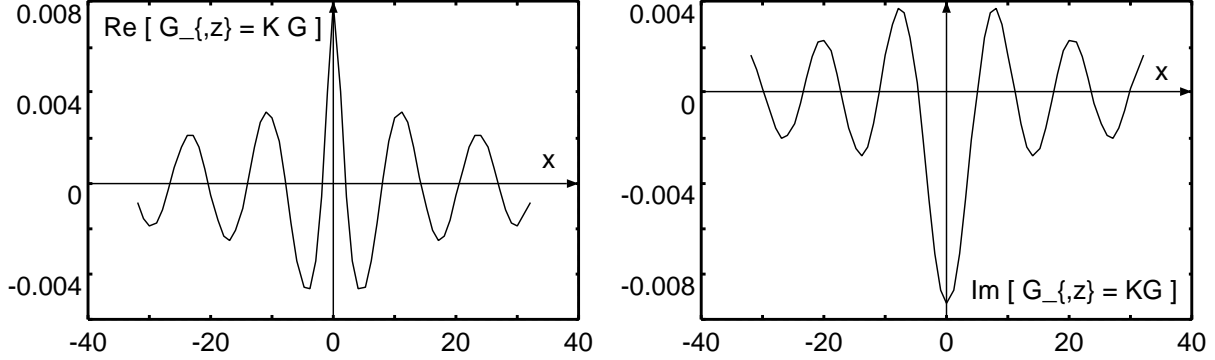


FIGURE 1. Real (left) and imaginary (right) parts of the free surface boundary condition $G_{,z} = KG$ at $z = 0$, due a square panel of length $L = 0.1$, submerged at depth $H = 1$ and pulsating at frequency ω .

4.2. Kelvin kernel at very low frequencies or near the vertical axis. For very low frequencies $K \ll 1$, or in the neighborhood of $X = 0$, it can be shown that the terms H_0 , Y_0 and P_0 in Eq. (9) tend to cancel among each other and, consequently, the parenthesis results bounded $(\dots) < D$, with D a constant independent of K . Then, when the field point $\mathbf{x} = (x, y, z)$ does not match the source one $\boldsymbol{\xi} = (\xi, \eta, \zeta)$, the Kelvin kernel has the asymptotic form $G \rightarrow r^{-1} + s^{-1}$ for $K \rightarrow 0$ (low frequencies) or $X \rightarrow 0$ (near the vertical axis).

4.3. Kelvin kernel at very high frequencies or far away. For very high frequencies $K \gg 1$ or far away from the origin, it is verified that $X, Y \gg 1$ and, then, the following expansion can be used [1]

$$(46) \quad \int_0^Y d\alpha \frac{e^{\alpha-Y}}{\sqrt{\alpha^2 + X^2}} \approx \frac{1}{\sqrt{Y^2 + X^2}} + O(s^{-3});$$

which is valid for $X, Y \gg 1$. From this,

$$(47) \quad P_0 \approx \frac{2}{\pi} \frac{e^Y}{\sqrt{Y^2 + X^2}} = \frac{2}{\pi} \frac{e^Y}{Ks}.$$

Moreover (see [13])

$$(48) \quad \begin{aligned} J_n &\approx \sqrt{2/(\pi X)} \cos(X - n\pi/2 - \pi/4) & ; \\ Y_n &\approx \sqrt{2/(\pi X)} \sin(X - n\pi/2 - \pi/4) & ; \\ H_0 &\approx Y_0(X) + O(1/X) & ; \end{aligned}$$

therefore $J_n, Y_n, H_0 \sim O(X^{-1/2})$ and

$$(49) \quad \tilde{G} \approx -2\pi K e^{-Y} (Y_0 + iJ_0) - 2s^{-1} \quad ; \quad \text{for } X \gg 1.$$

Thus, for very high frequencies $K \gg 1$ or far away from the origin, it is verified that $X, Y \gg 1$, and the wave kernel has the asymptotic form $\tilde{G} \rightarrow -2s^{-1}$. Then, the Kelvin one has the asymptotic form $G \rightarrow r^{-1} - s^{-1}$ for $K \gg 1$ (high frequencies) or $X \gg 1$ (far away).

4.4. Direct computation of the special functions. The Struve differential equation is (see chap. 9 [13])

$$(50) \quad z^2 \frac{d^2 w}{dz^2} + z \frac{dw}{dz} + (z^2 - \nu^2) w = \frac{4(z/2)^{\nu+1}}{\sqrt{\pi} \Gamma(\nu + 1/2)} ;$$

where $z = x + iy$ is the complex variable and Γ is the factorial function. Its general solution is

$$(51) \quad w = aJ_\nu(z) + bY_\nu(z) + H_\nu(z) ;$$

where J_ν and Y_ν are the Bessel functions, of first and second kind, respectively, H_ν is the Struve one, all these of integer order ν , and a, b are constants. A direct computation involves ascending and descending series. The ascending series for the Bessel function of first class $J_n(X)$ and order $n = 0, 1$ are

$$(52) \quad J_0(X) = \sum_{k=0}^{\infty} \frac{(-X^2/4)^k}{k!(k+1)!} ;$$

$$(53) \quad J_1(X) = \frac{X}{2} \sum_{k=0}^{\infty} \frac{(-X^2/4)^k}{k!k!} .$$

While the corresponding ones for the Bessel function of second kind

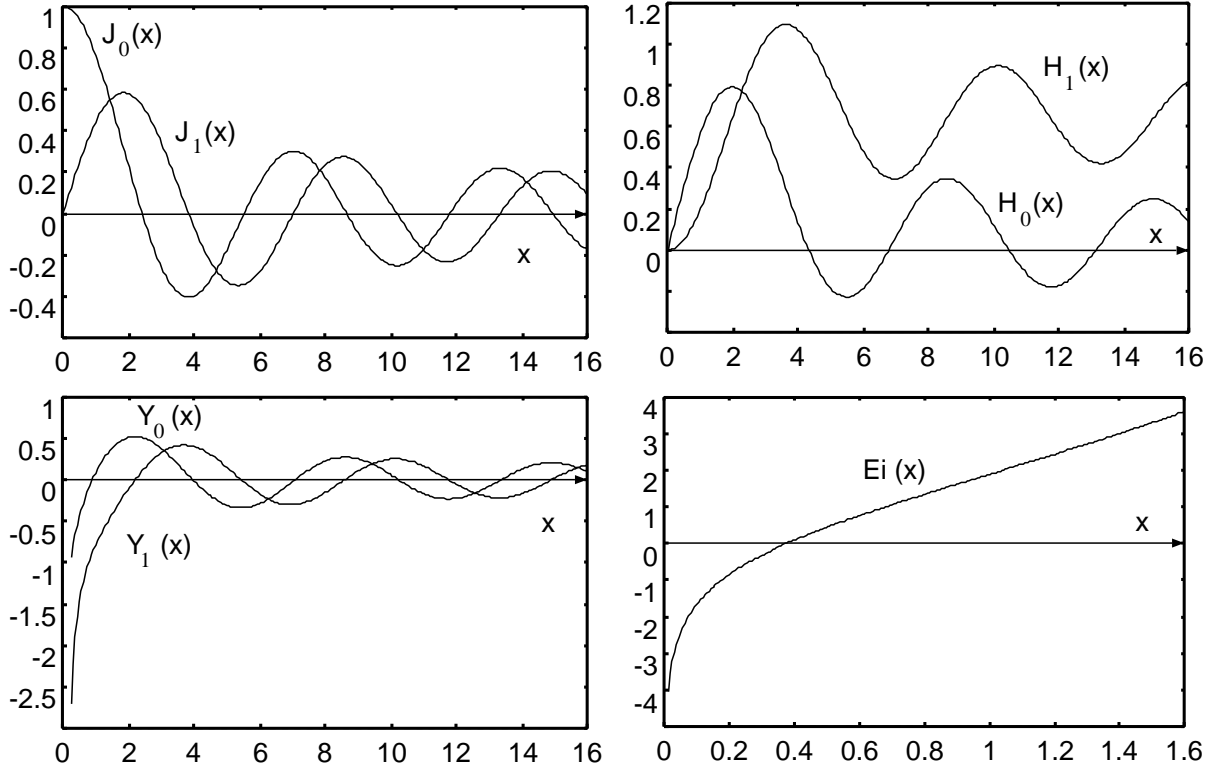


FIGURE 2. Bessel functions of the first kind J_0 and J_1 (top-left), Bessel functions of the second kind Y_0 and Y_1 (bottom-left), Struve functions H_0 and H_1 (top-right), and exponential integral $Ei(x)$ (bottom-right).

$Y_n(X)$ are

$$(54) \quad Y_0(X) = \frac{2}{\pi} \{ [\ln(X/2) + \gamma] J_0(X) + A \};$$

and

$$(55) \quad Y_1(X) = \frac{2}{\pi} \{ \ln(X/2) J_1(X) - 1/X - B \};$$

where

$$(56) \quad A = \sum_{k=1}^{\infty} \frac{(-1)^{k+1} (X^2/4)^k}{k!k!} s_k;$$

$$(57) \quad B = \frac{X}{4} \sum_{k=0}^{\infty} \frac{\psi_{k+3/2}(-X^2/4)^k}{k!(k+1)!};$$

with $\psi_{k+3/2} = \psi_{k+1} + \psi_{k+2}$ and

$$(58) \quad \mathfrak{s}_k = \sum_{m=1}^k \frac{1}{m};$$

$$(59) \quad \psi(n) = -\gamma + \sum_{m=1}^{n-1} k^{-1};$$

where $\gamma = 0.5772\dots$ is the Euler constant and $\psi(1) = -\gamma$. On the other hand, for the Struve functions $H_n(X)$ of order $n = 0, 1$ (see chap. 9 [13])

$$(60) \quad H_0(X) = \frac{2}{\pi} \sum_{k=0}^{\infty} (-1)^k X^{2k+1} \prod_{\mathfrak{s}=0}^k \frac{1}{(2\mathfrak{s}+1)^2};$$

and

$$(61) \quad H_1(X) = \frac{2}{\pi} \sum_{k=0}^{\infty} \frac{(-1)^{k+1} X^{2k}}{(2k+1)} \prod_{\mathfrak{s}=0}^{k-1} \frac{1}{(2\mathfrak{s}+1)^2}.$$

When the abscissa X is far from the origin, these series show slow rate of convergence and numerical instability. Then, they are replaced by the asymptotic expansions

$$(62) \quad J_n(X) \approx \sqrt{\frac{2}{\pi X}} \cos\left(X - n\frac{\pi}{2} - \frac{\pi}{4}\right);$$

$$(63) \quad Y_n(X) \approx \sqrt{\frac{2}{\pi X}} \sin\left(X - n\frac{\pi}{2} - \frac{\pi}{4}\right);$$

for $X > 25$, while for the Struve ones the expressions adopted are

$$(64) \quad H_0(X) \approx Y_0(X) + \frac{2}{\pi} h_0(X);$$

$$(65) \quad H_1(X) \approx Y_1(X) + \frac{2}{\pi} [h_1(X) + 1];$$

where

$$(66) \quad h_0(X) \approx \sum_{k=0}^{\infty} \frac{1}{(-1)^k X^{2k+1}} \prod_{s=0}^{k-1} (2s+1)^2 ;$$

$$(67) \quad h_1(X) \approx \sum_{k=1}^{\infty} \frac{2k-1}{(-1)^{k+1} X^{2k}} \prod_{s=0}^{k-2} (2s+1)^2 ;$$

for $X > 30$. The derivatives of Eq. (54) and (64) with respect to X are, respectively,

$$(68) \quad \begin{aligned} dY_0/dX &= -Y_1 & ; \\ dH_0/dX &= 2/\pi - H_1 & . \end{aligned}$$

Finally, an asymptotic expansion for the exponential integral $\text{Ei}(Y)$ (see chap. 5 [13]) is

$$(69) \quad \text{Ei}(Y) = \gamma + \ln(Y) + \sum_{k=0}^{\infty} \frac{Y^k}{k k!} \quad \text{for } Y > 0.$$

In Fig. 2 the following plots are shown: (i) the Bessel functions of the first kind J_0 and J_1 (top-left), (ii) the Bessel functions of the second kind Y_0 and Y_1 (bottom-left), (iii) the Struve functions H_0 and H_1 (top-right), and (iv) the exponential integral $\text{Ei}(x)$ (bottom-right).

5. NUMERICAL EXAMPLES

5.1. Free surface test. The Kelvin kernel computation is validated by a numerical test, where the free surface boundary condition

$$(70) \quad \frac{\partial G}{\partial z} = KG \quad \text{at } z = 0 ;$$

is explicitly computed on a grid over the plane $z = 0$, inside a finite sector $|x, y|/L < 200$. The source is a square panel of length $L = 0.1$, submerged at depth H and harmonically pulsating at frequency ω . Thus, Eq. (70) is verified at machine precision. In Fig. 3 (left), a three-dimensional view of the wave pattern on the plane $z = 0$ produced by the submerged source panel is shown.

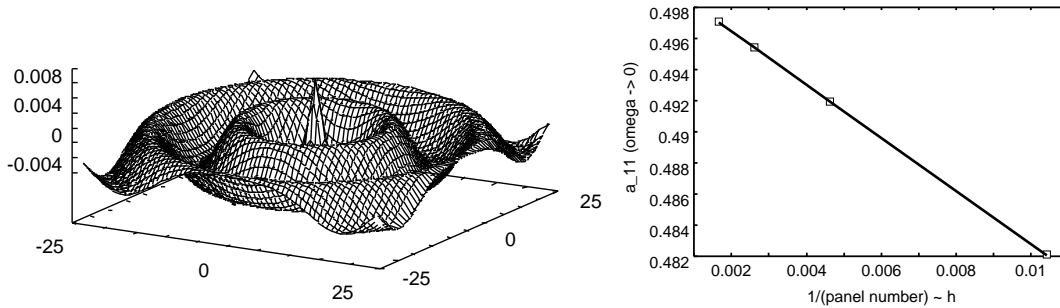


FIGURE 3. Wave pattern on the $z = 0$ plane caused by a square panel of length $L = 0.1$, submerged at depth $H = 1$ and pulsating at frequency ω (left). Convergence plot for the surge added mass of the unit hemisphere at very low frequencies ($\omega \rightarrow 0$) obtained with a lineal regression analysis (exact $A'_{11} = 1/2$) (right).

5.2. Body coordinates and motions. In seakeeping, the body coordinate system (X, Y, Z) is fixed to the rigid body, i.e. it moves together with it. The Z -axis is upwards, the X -axis to bow and, when there is not motion, the plane $Z = 0$ matches the still water plane, as represented in Fig. 4 (left). The harmonic body motion is given by the instantaneous position of the body coordinate system (X, Y, Z) with respect to the moving-frame (x, y, z) and it is decomposed on surge, sway and heave oscillating translations along the body-axes, and on its roll, pitch and yaw oscillating rotations, also around the body-axes, see Fig. 4 (left).

5.3. Oscillating floating unit hemisphere. An oscillating hemisphere of radius $R = 1$ in surge ($k = 1$) and heave ($k = 3$) modes is considered. Due to the symmetry between the surge and sway ($k = 2$) modes, it is not necessary determining the sway mode, nevertheless, for a code validation, it was also verified at machine precision, in a perfectly symmetric mesh. The added mass coefficients are computed as $A'_{kk} = A_{kk}/(\rho V)$, and the damping ones as $D'_{kk} = D_{kk}/(\rho V \omega)$, where $V = (2/3)\pi R^3$ is the hemisphere volume, ρ is fluid density and ω is the imposed circular frequency. In Fig.

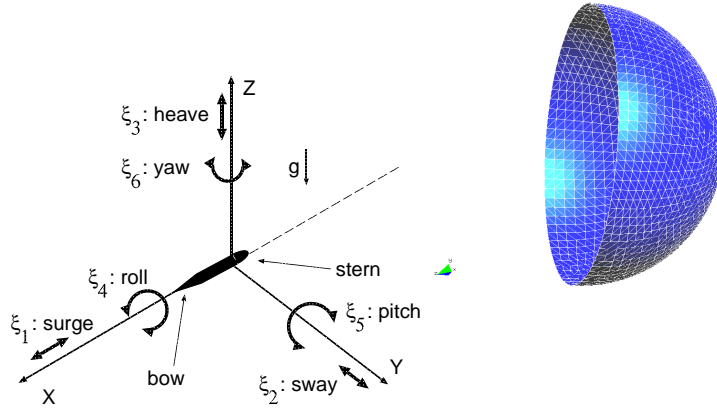


FIGURE 4. Degrees of freedom with respect to the body coordinate system (left). Boundary mesh with 3 000 Kelvin panels over a hemisphere (right).

3 (right), a convergence plot for the surge added mass at very slow frequencies ($\omega \rightarrow 0$) is shown, obtained with a lineal regression analysis (exact value $A'_{11} = 1/2$). The mesh is shown in Fig. 4 (right) and has 3 000 Kelvin panels over the wetted body surface. Plots of the added mass A'_{kk} and damping coefficients D'_{kk} , as a function of the wave number coefficient KR , are shown for the surge and sway modes in Fig. 5 (left), and the heave one (right), which are in good agreement with the literature results [17]. The asymptotic values of these coefficients, for very slow and very high frequencies, can be obtained analytically, e.g. by variable separation or image methods. For the surge/sway mode at very slow frequency, the boundary condition $\phi_{,z} = 0$ is equivalent to a symmetry operation with respect to the plane $z = 0$ and, then, corresponds to the solution of a sphere oscillating in an infinite medium. The added mass for the last case is half of the displaced volume, then, the surge/sway added mass coefficient is $A'_{11} = 1/2$ with respect to the true displaced mass $(2/3)\pi R^3\rho$, where the half factor is due to the analytic prolongation.

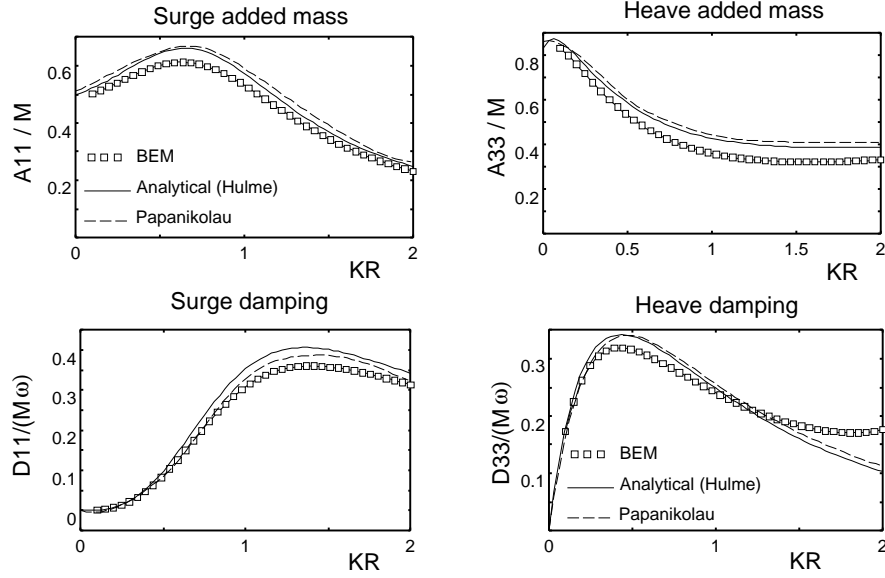


FIGURE 5. Added mass A'_{kk} and damping coefficients D'_{kk} of the oscillating unit hemisphere, for surge-sway (left) and heave (right) modes, as a function of the wave number coefficient KR .

On the other hand, the asymptotic values of the added mass in heave mode are not easy to obtain and could be computed with spherical harmonics (e.g. see [18]). Bounds for the surge A'_{11} and heave A'_{33} added mass coefficients of the oscillating unit hemisphere at very slow and very high frequencies are summarized in Table 1. The first column corresponds to those found in [18]. The values for the surge/sway mode in the second column correspond to those found in [19] and [20], while the corresponding ones to the heave mode are taken from [21] and [22]. It should be noted that only the intervals $[0.25, 1.50]$ and $[0.6, 1.5]$ were considered in [20], respectively, and, then, the extrapolations are rather doubtful. The third column corresponds to the results found in [23]. Korsmeyer used a panel method with Fourier transform and complex impedance extended to very slow frequencies, while Hulme used spherical harmonics. The Sierewogel, Prins and Liapis results were obtained with other panel

	[18]	A'_{11} from [19, 20] A'_{33} from [21]	[23, 22]
$\lim_{KR \rightarrow 0} A'_{11}$	0.5	0.5	0.5
$\lim_{KR \rightarrow \infty} A'_{11}$	0.272 220 012 593	0.25 ...	0.273 239...
$\lim_{KR \rightarrow 0} A'_{33}$	0.830 949 128 536	0.80 ...	0.830 951...
$\lim_{KR \rightarrow \infty} A'_{33}$	0.5	0.45	0.5

TABLE 1. Added mas coefficients for surge/sway mode A'_{11} and heave A'_{33} one taken from literature.

methods with Kelvin kernels. In general, the concordance among the present results and the literature ones is good.

6. CONCLUSIONS

A semi-numerical scheme for computing the Kelvin kernel for sea-keeping flow problems has been proposed. The Kelvin kernel is decomposed as the sum of two Rankine sources and a wave one. The Rankine sources are the standard Green functions for the Laplacian equation, one due to the generic panel on the body surface, placed below the plane $z = 0$, and the other one due to the mirror image with respect to the same plane. The wave kernel (i) tends to be ill-conditioned for field points near or over the local axisymmetric axis; and (ii) involves a rather heavy computation, due to the Haskind-Havelock integral which, in turn, involves the computation of Bessel and Strouve functions. The Haskind-Havelock integral was accurately computed with a singularity subtraction technique that involves a regular closed term and a numerical adaptive quadrature, while the Bessel and Strouve functions were calculated with asymptotic expansions. The semi-numerical proposed scheme was validated with analytical and semi-analytical solutions for the unit hemisphere in surge and heave motions, without showing numerical instabilities nor severe precision loss.

Acknowledgements. This work has received financial support from Consejo Nacional de Investigaciones Científicas y Técnicas (CONICET, Argentina, grant PIP 5271-05), Universidad Nacional del

Litoral (UNL, Argentina, grant CAI+D 2009–III-4–2), Agencia Nacional de Promoción Científica y Tecnológica (ANPCyT, Argentina, grants PICT 1506–06, PICT 1141–07 and PAE 22592–04 nodo 22961) and was performed with the *Free Software Foundation/GNU-Project* resources as GNU–Linux OS, GNU–Gfortran and GNU–Octave, as well as other Open Source resources as Scilab, TGif, Xfig and L^AT_EX.

REFERENCES

- [1] J.N. Newman. The theory of ship motions. *Advances in Applied Mechanics*, 18:221–285, 1978.
- [2] J. Nossen, J. Grue, and E. Palm. Wave forces on three-dimensional floating bodies with small forward speed. *J. of Fluid Mechanics*, 227:135–160, 1991.
- [3] S. Finne and J. Grue. On the complete radiation-diffraction problem and wave-drift damping of marine bodies in the yaw mode of motion. *J. of Fluid Mechanics*, 357(289-320), 1998.
- [4] R.F. Beck and W.C. Webster. Seakeeping and controllability. In E.V. Lewis, editor, *Principles of Naval Architecture*, volume III. SNAME, 1989.
- [5] F. París and J. Cañas. *Boundary Element Method. Fundamentals and applications*. Oxford Press, 1997.
- [6] W. Hackbusch. *Integral equations*. Birkhäuser, 1995.
- [7] J. D’Elía, L. Battaglia, A. Cardona, and M. Storti. Full numerical quadrature of weakly singular double surface integrals in Galerkin boundary element methods. *Communications in Numerical Methods in Engineering*, 2009. in press.
- [8] F. Hartmann. *Introduction to Boundary Elements*. Springer-Verlag, 1989.
- [9] Y. Huang and P.D. Sclavounos. Nonlinear ship motions. *J. of Ship Research*, 42(2):120–130, 1998.
- [10] D.C. Kring. Ship seakeeping through the $\tau = 1/4$ critical frequency. *J. of Ship Research*, 42(2):113–119, 1998.
- [11] F. Noblesse. The Green function in the theory of radiation and diffraction of regular water waves by a body. *J. of Engineering Mathematics*, 16:137–169, 1982.
- [12] J.N. Newman. Algorithms for the free-surface Green function. *J. of Engineering Mathematics*, 19:57–67, 1985.
- [13] M. Abramowitz and I. Stegun. *Handbook of Mathematical Functions*. Dover, 1972.

- [14] D.E. Medina and J.A. Liggett. Three-dimensional boundary element computation of potential flow in fractured rock. *Int. J. for Num. Meth. in Eng.*, 26:2319–2330, 1988.
- [15] J. D'Elía, M.A. Storti, and S.R. Idelsohn. A closed form for low order panel methods. *Advances in Engineering Software*, 31(5):335–341, 2000.
- [16] J. D'Elía, M. A. Storti, and S. R. Idelsohn. Iterative solution of panel discretizations for potential flows. The modal/multipolar preconditioning. *Int. J. Num. Meth. Fluids*, 32(1):1–22, 2000.
- [17] A. Papanikolaou. On the integral-equation-methods for the evaluation of motions and loads of arbitrary bodies in waves. *Ingenieur-Archiv*, 55:17–29, 1985.
- [18] M. A. Storti and J. D'Elía. Added mass of an oscillating hemisphere at very-low and very-high frequencies. *ASME, Journal of Fluids Engineering*, 126(6):1048–1053, November 2004.
- [19] L. Sieravogel. *Time-domain Calculations of Ship Motions*. PhD thesis, Technische Universiteit Delft, 1998.
- [20] H.J. Prins. *Time-domain Calculations of Drift Forces and Moments*. PhD thesis, Technische Universiteit Delft, 1995.
- [21] F.T. Korsmeyer and P.D. Sclavounos. The large-time asymptotic expansion of the impulse response function for a floating body. *Applied Ocean Research*, 11(2):75–88, 1989.
- [22] S.J. Liapis. *Time-domain Analysis of Ship Motions*. PhD thesis, University of Michigan, 1986.
- [23] A. Hulme. The wave forces acting on a floating hemisphere undergoing forced periodic oscillations. *J. Fluid Mechanics*, 121:443–463, 1982.

Received September 8, 2006; accepted February 9, 2007.