

STRUCTURAL DESIGN AND VIBRATION CONTROL FOR A CANTILEVER BEAM

Alexandre Molter^a, Jun S. O. Fonseca^b, Valdecir Bottega^a

^a *Universidade Federal de Pelotas, Dep. Mathematics and Statistics, Campus Universitário, s/nº, 354, 96010-900, Pelotas, RS, Brazil, alexandremolter@yahoo.com.br, valdecir.bottega@ufpel.edu.br*

^b *Universidade Federal do Rio Grande do Sul, Dep. Mechanical Engineering, R. Sarmiento Leite, 425, 90050-170, Porto Alegre, RS, Brazil, jun@ufrgs.br*

Keywords: Optimization, control, vibrations, dynamics.

Abstract. The objective of this work is to present a structural design methodology considering the control effects, the change of the topology by a control force action, and design modal control for suitable fixed actuator locations. The structural optimization design in a cantilever structure is completed through a homogenization design method, while the control force is obtained by the optimal control design for transient response and performed in the modal space. In this work the actuators locations are chosen arbitrarily prior to the structural design. In fact, it is a known fact that a good location for an actuator in a cantilever structure is close the fixed size of the structure, since it acts upon the first and most significant mode. The lower fundamental modes are responsible for the most of the tip displacement of the beam; therefore the first two eigenfunctions are computed and considered in the work. The additional dynamics and control design were included in a topology optimization code. Simulations were conducted to assess the optimality and control model efficiency.

1 INTRODUCTION

Structural topology optimization and structural vibration control have called attention both in theoretical research and practical applications in engineering. Structural vibration control is a particularly important consideration in the design of dynamic systems. The main idea of the structural optimization is to obtain an optimal material layout of a load-bearing structure. Usually, continuum topology optimization problems are formulated to minimize the structural material volume or to optimize the structural performance. A typical example is to raise the first fundamental frequency of a structure while obeying a volume constraint (Zhan, Xiaoming and Rui, 2009). Meanwhile, structural dynamics control is used to minimize or suppress vibration effects.

There are always fundamental interest in designs with efficient structural control system from both structural and control engineers. However, these groups have been working independently. Traditionally, the structural designer develops his design based on strength and stiffness requirements, and the control designer creates the control algorithm to reduce the dynamic response of a structure (Ou and Kikuchi, 1996). In this work we are designing the structure and controls simultaneously, meaning that the cost function includes not only the strain energy, but also the control energy.

The reason why topology optimization is becoming a very important research field is the necessity of efficient methodologies to design structures, thus saving material and time. The main objective of the topology optimization problem is to find a material distribution that minimizes a given objective functional, subjected to a set of constraints, achieved by a consistent parameterization of the material properties in each part of the design domain. A natural question is whether there exists or not material in a given point, which leads to a discrete problem. It is well-known that this integer parameterization leads to numerical difficulties, associated with the integer problem convergence (Cardoso and Fonseca, 2003; Bendsøe and Kikuchi, 1988; Bendsøe and Sigmund, 1999). Minimizing the vibration effects of the dynamic response is an important goal for the structural vibration control, and the effectivity of the control depends on the weighting matrices.

The objective of this paper is to present a structural design methodology considering the control effects, the change of the topology by a control force action, and design modal control for suitable fixed actuator locations. The structural optimization design is completed through a density design method, while the control force is obtained by the optimal control design for transient response and performed in the modal space.

The efficient structural control design needs a careful selection of actuator positions (Ou and Kikuchi, 1996). However, in this work the actuators locations are chosen arbitrarily prior to the structural design. In fact, it is well known that a good location for an actuator in a cantilever structure is close the fixed size of the structure, since it acts upon the first and most significant mode. The lower fundamental modes are responsible for the most of the tip displacement of the beam; therefore, the first two eigenfunctions are computed and considered in this work.

The additional dynamics and control design were included in a topology optimization code (Sigmund, 2001). Simulations were conducted to assess the effectiveness and control model efficiency.

2 FORMULATION OF STRUCTURAL TOPOLOGY OPTIMIZATION CONSIDERING CONTROL ACTION

In this work the homogenization design method (Bendsøe and Sigmund, 2003) is the tool for the topology optimization considering a control action. This method is based on the concept of optimizing the material distribution, through a density distribution. A finite element mesh is defined to perform the structural modal analysis (Bathe, 1996). As a simplification, we assume that the density is constant in each finite element. An optimality criteria (OC) is derived from the necessary minimization conditions, and it is solved to update the density distribution. A number of simplifications are introduced to the implementation, as a regular mesh.

We now consider that the objective function is the sum of the strain energy and the control energy. Then, the topologic optimization problem in steady state has the form

$$\begin{aligned} \min_{\mathbf{x}} J, J(\mathbf{x}) = \mathbf{f}^T \mathbf{R} \mathbf{f} + \mathbf{U}^T \mathbf{Q} \mathbf{U} \\ \text{st} \left\{ \begin{array}{l} \frac{V(\mathbf{x})}{V_0} = V_{min} \\ \mathbf{K} \mathbf{U} = \mathbf{H} \mathbf{f} + \mathbf{F} \\ \mathbf{0} < \mathbf{x}_{min} \leq \mathbf{x} \leq \mathbf{1} \end{array} \right. , \end{aligned} \quad (1)$$

where \mathbf{U} is an $nx1$ displacement vector, \mathbf{H} is an nxm location matrix for the control force, m is the number of action control forces and \mathbf{F} is an $nx1$ applied external force vector, \mathbf{f} is an $mx1$ control force vector. The magnitudes of the matrices \mathbf{Q} and \mathbf{R} are assigned according to the relative importance of the state variables and the control force in the minimization procedure. The matrix \mathbf{Q} can be adjusted by $\mathbf{Q}=\mathbf{K}$, where \mathbf{K} is the finite element global stiffness matrix. \mathbf{x} is the vector of design variables, \mathbf{x}_{min} is a vector of minimum relative densities. $V(\mathbf{x})$ and V_0 is the material volume and design domain volume, respectively and V_{min} is the prescribed volume function. Considering the discretization,

$$\mathbf{U}^T \mathbf{K} \mathbf{U} = \sum_{e=1}^N (x_e)^p \mathbf{u}_e^T \mathbf{k}_e \mathbf{u}_e , \quad (2)$$

where N is the number of elements, p is the penalization exponent, \mathbf{u}_e and \mathbf{k}_e are the element displacement vector and stiffness matrix, respectively.

The optimization problem is solved using the Optimality criterion (OC), and this criterion is derived from the Karush-Kuhn-Tucker conditions (Bendsøe and Kikuchi, 1988). The Lagrangian function of the minimization problem is

$$L(\mathbf{x}) = J(\mathbf{x}) + \lambda_0 (V(\mathbf{x}) - V_{min} V_0) + \lambda_1^T (\mathbf{K} \mathbf{U} - (\mathbf{H} \mathbf{f} + \mathbf{F})) + \sum_{e=1}^N \lambda_{2e} (x_{min} - x_e) + \sum_{e=1}^N \lambda_{3e} (x_e - x_{max}) . \quad (3)$$

where the scalar λ_0 and the vector λ_1 are the global Lagrangian multipliers, and the scalars λ_{2e} and λ_{3e} are Lagrangian multipliers for lower and upper side constraints.

To locate a stationary point, it is necessary that $\partial L / \partial x_e = 0$, then

$$\frac{\partial L}{\partial x_e} = \frac{\partial J}{\partial x_e} + \lambda_0 \frac{\partial V}{\partial x_e} + \lambda_1^T \frac{\partial (\mathbf{K} \mathbf{U} - (\mathbf{H} \mathbf{f} + \mathbf{F}))}{\partial x_e} - \lambda_{2e} + \lambda_{3e} = 0, \quad (4)$$

Assume that constrains of the design variables are not active, $\lambda_{2e} = \lambda_{3e} = 0$, and that the load and forces are design independent, $\frac{\partial(\mathbf{H}\mathbf{f} + \mathbf{F})}{\partial \mathbf{x}} = 0$. With some expanding of the terms, also simplification of the equations and heuristics scheme for the design variables (Sigmund, 2001) we can obtain the new x_e for each iteration. More details about the expanding of the terms can be seen in the follow subsection, Sensitivity Analysis. The mesh-independent filter is the same as in Sigmund (2001).

The feedback requires a full knowledge of states. By using the displacement closed-loop feedback control we can assume

$$\mathbf{f} = -\mathbf{R}^{-1}\mathbf{H}^T\mathbf{U}, \quad (5)$$

then the equilibrium constraint from Eq. (1) becomes

$$\mathbf{K}_c\mathbf{U} = \mathbf{F}, \quad (6)$$

where

$$\mathbf{K}_c = \mathbf{K} + \mathbf{H}\mathbf{R}^{-1}\mathbf{H}^T. \quad (7)$$

We can note that this \mathbf{K}_c is the modified matrix under control effect and the modification appears where the force control is applied, which affects also the eigenvalues and displacement of the structure. The problem can be solved as the conventional static finite element method in standard form $\mathbf{K}_c\mathbf{U} = \mathbf{F}$.

The influence of the weighting matrix \mathbf{R} is an important aspect to consider. To have significant effect on the topology of the structure, the matrix \mathbf{R}^{-1} need an equivalent magnitude compatible with the stiffness matrix. Since the stiffness is modified on each iteration, then \mathbf{R} is chosen as $\mathbf{R} = \text{diag}(\mathbf{w}/\lambda)$, where λ are the eigenvalues (the smallest to the largest) and \mathbf{w} are weighting constants with the same order of magnitude of the stiffness terms.

2.1 Sensitivity Analysis

Sensitivities are defined as the derivatives of the objective function and the constraints with respect to the design variables, and is often the major computational cost of the optimization. In this work the objective function sensitivity requires differentiating displacements (which implies stiffness differentiation) and eigenvalues. The objective function can be simplified using Eq. (2) into Eq. (1), then $J = \mathbf{f}^T\mathbf{R}\mathbf{f} + \mathbf{U}^T(\mathbf{H}\mathbf{f} + \mathbf{F})$. Using Eq. (5), this yields $J = \mathbf{F}^T\mathbf{U}$. Taking the derivative of the objective function, on each element, one can obtain

$$\frac{\partial J}{\partial \mathbf{x}_e} = \mathbf{F}^T \frac{\partial \mathbf{U}}{\partial \mathbf{x}_e}, \quad (8)$$

and substituting

$$\frac{\partial \mathbf{U}}{\partial \mathbf{x}_e} = -\mathbf{K}_c^{-1} \frac{\partial \mathbf{K}_c}{\partial \mathbf{x}_e} \mathbf{U} \quad (9)$$

and

$$\frac{\partial \mathbf{K}_e}{\partial \mathbf{x}_e} = \frac{\partial \mathbf{K}}{\partial \mathbf{x}_e} + \frac{\mathbf{1}}{\mathbf{w}} \mathbf{H} \frac{\partial \lambda}{\partial \mathbf{x}_e} \mathbf{H}^T \quad (10)$$

into (8), we have

$$\frac{\partial J}{\partial \mathbf{x}_e} = - \left(\mathbf{U}^T \frac{\partial \mathbf{K}}{\partial \mathbf{x}_e} \mathbf{U} + \frac{\mathbf{1}}{\mathbf{w}} \mathbf{U}^T \mathbf{H} \frac{\partial \lambda}{\partial \mathbf{x}_e} \mathbf{H}^T \mathbf{U} \right). \quad (11)$$

The sensitivity of the each eigenvalue can be seeing in Haftka *et al.* (1990), and is computed by

$$\frac{\partial \lambda}{\partial \mathbf{x}_e} = \phi^T \left(\frac{\partial \mathbf{K}}{\partial \mathbf{x}_e} - \lambda \frac{\partial \mathbf{M}}{\partial \mathbf{x}_e} \right) \phi = \phi_e^T \left(\frac{\partial \mathbf{k}_e}{\partial \mathbf{x}_e} - \lambda \frac{\partial \mathbf{m}_e}{\partial \mathbf{x}_e} \right) \phi_e, \quad (12)$$

where ϕ is the mass-normalized eigenvector and \mathbf{M} is the mass matrix, on each element ϕ_e and \mathbf{m}_e .

3 CONTROL EFFECTS ON STRUCTURAL TOPOLOGY

It is clear that control forces acting in different locations on the structure should influence the optimized design. To exemplify this fact, we assume a design domain as a cantilever beam shows in Figure 1.

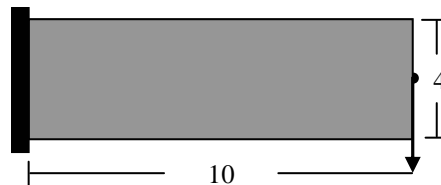


Figure 1. Design domain.

For a structural only design of this domain, we use the compliance as the objective function, and obtain the topology shown in Figure 2a. Then we try to introduce a control force on this design layout. It is possible that on the desired location for the actuator there is no material. If the optimization is performed without considering the control force, then we need either to change the actuator location or to redesign the structure. In Figure 2a we indicated with a point (small circle) the actuator location and designed the structure again, this time considering the control force. The new topology for this problem is shown in Figure 2b. The mesh domain in the simulation is 16×40 finite elements.

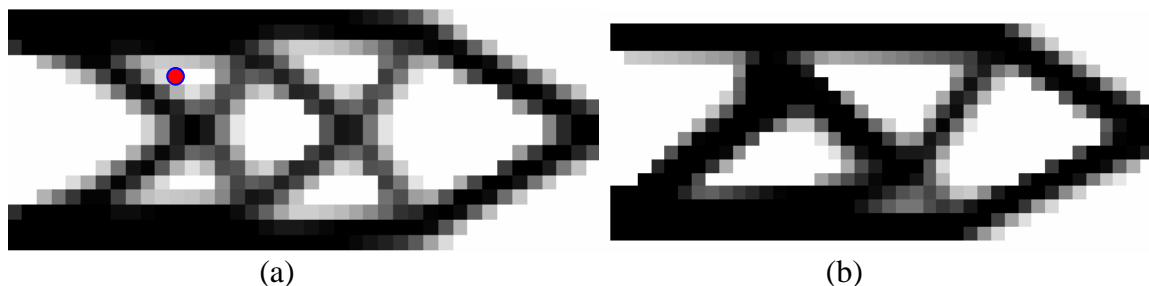


Figure 2. a-Topology optimization without control force action. b-Topology optimization with control force action.

In this simulation it can be noted that the structure design change completely with the control action effects. Additionally some attention for the actuator location is required to assure the controllability of the system.

4 OPTIMAL CONTROL DESIGN IN MODAL SPACE

After computing the optimal structure we search for the vibration suppression for a transient response of the system. It is possible to design the control for the displacement of a particular point of the structure, but in this work we derive the control in independent modal space.

The formulation of independent modal space control, derived by the classical optimal theory (Bertsekas, 1995), associated with the distributed-parameter system can be written briefly as follows. The modal formulation for the system is

$$\ddot{\eta} + \omega^2 \eta = \phi^T \mathbf{H} \mathbf{f}, \quad (13)$$

where ω are the angular frequencies.

The dynamic system defined by Eq. (13) can be parameterized in first order equations and written in the state- coefficient form

$$\dot{\mathbf{y}} = \mathbf{A} \mathbf{y} + \mathbf{B} \mathbf{f}, \quad (14)$$

where \mathbf{y} is a state, time dependent variable, $\dot{\mathbf{y}} \in \mathcal{R}^{2n}$ is the vector of the first order time derivatives of the states in modal space, $\mathbf{f} \in S \in \mathcal{R}^m$ is the control vector, S is the control constraint set. This system represents the constraints from the nonlinear regulator problem, together with $\mathbf{y}(t_0) = \mathbf{y}_0$, $\mathbf{y}(\infty) = \mathbf{0}$, respectively the initial and final conditions.

The coefficient matrices, in modal space, without considering damping, are given by

$$\mathbf{A} = \begin{bmatrix} \mathbf{0} & \mathbf{I} \\ -\omega^2 & \mathbf{0} \end{bmatrix}, \quad \mathbf{B} = \begin{bmatrix} \mathbf{0} \\ \phi^T \mathbf{H} \end{bmatrix}, \quad (15)$$

where $\mathbf{A} \in \mathcal{R}^{2n \times 2n}$ and $\mathbf{B} \in \mathcal{R}^{2n \times m}$. It is assumed that $\mathbf{f}(\mathbf{0}) = \mathbf{0}$, which imply that the origin is an equilibrium point.

A state feedback rather than output feedback is adopted to enhance the control performance. The quadratic cost function for the regulator problem is given by

$$J_c = \frac{1}{2} \int_{t_0}^{\infty} [\mathbf{y}^T \mathbf{Q}_c \mathbf{y} + \mathbf{f}^T \mathbf{R}_c \mathbf{f}] dt, \quad (16)$$

where $\mathbf{Q}_c \in \mathcal{R}^{2n \times 2n}$ is semi-positive-definite matrix and $\mathbf{R}_c \in \mathcal{R}^{m \times m}$ positive definite. There are weighting matrices on the state and control inputs, respectively.

Assuming full state feedback, the control law is given by

$$\mathbf{f} = -\mathbf{R}_c^{-1} \mathbf{B}^T \mathbf{P} \mathbf{y}. \quad (17)$$

The algebraic Riccati equation to obtain \mathbf{P} , is given by

$$\mathbf{A}^T \mathbf{P} + \mathbf{P} \mathbf{A} - \mathbf{P} \mathbf{B} \mathbf{R}_c^{-1} \mathbf{B}^T \mathbf{P} + \mathbf{Q}_c = \mathbf{0}. \quad (18)$$

The computational cost is high if all modes are considered. But it can be dramatically reduced if only a few modes are dominant and their control is sufficient for the whole structure.

5 RESULTS

The physical system considered in this work is composed by cantilevered steel beam shown in Fig. 1. The resulting topology for this problem is show in Figure 3, where the locations of the horizontal control forces are indicate by points (small circles). This location for the actuator was chosen because it is a known fact that the best place for one actuator is as close as possible to the fixed size of the structure, which bears the maximum stress induced by the first and most significant mode.

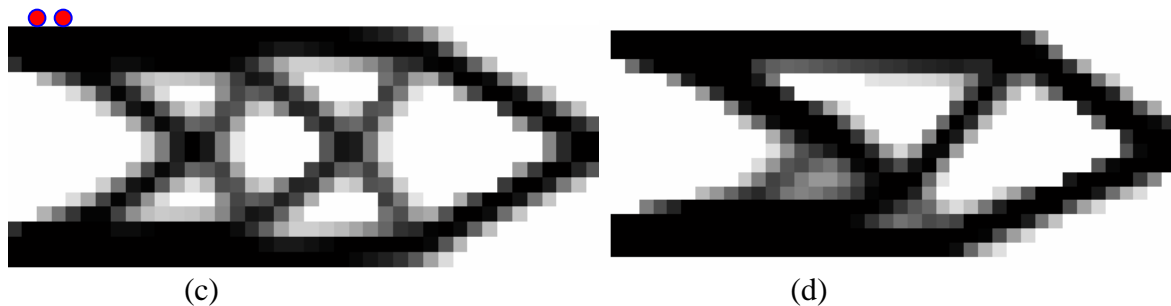


Figure 3. c-Topology optimization without control force action. d-Topology optimization with control force action.

Some simplifications are introduced to the problem and its response analysis. We assume that the two control points can have different forces. This fact means that there are two external actuators. Embedded actuators (piezoelectric materials or hydraulic mechanisms), would generate equal magnitude opposing forces and need to be explicitly included in the model.

The convergence of the objective function is plotted in Figure 4.


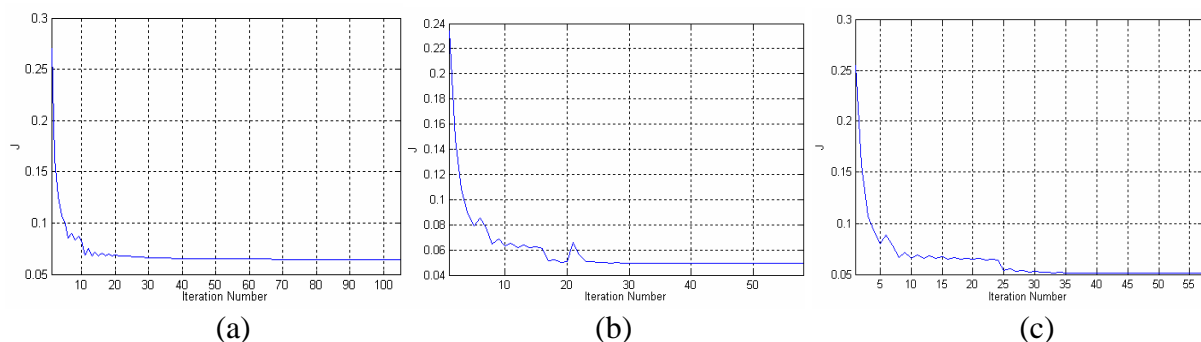


Figure 4. Objective function convergence a- without control; b- with one control force; c- with two control forces

We can observe in Figure 4 that the convergence is faster in the initial 30 iterations, after there is a smaller change of the objective function value at each iteration.

The structure shown in Figure 1 subject to transient forces produces initial deformation and so active the natural vibrations. The two free vibration modes of the model in Figure 1, which finite element discretization are shown in the figures 5a and 5b,

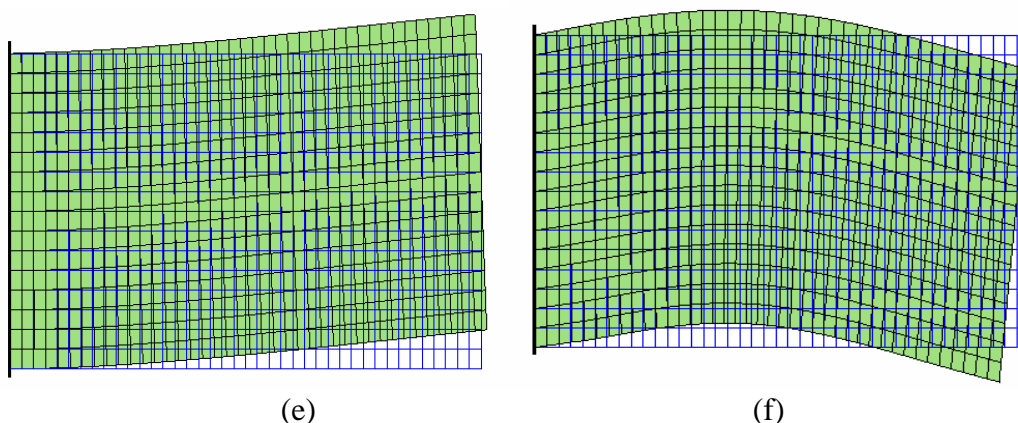

(e) (f)
Figure 5. Deflections of first and second modes of the beam.

The results of the optimal control simulation in Matlab are shown in Figure 6. The weighting matrices are $\mathbf{Q}_c = \text{diag}\{1\}$, $\mathbf{R}_c = \text{diag}\{0.5\}$. Here are considered the two first modes of the optimized structure. The position 1 is on the left point (small circle) and position 2 on the right, shown in Figure 3. The fourth-order Runge-Kutta method was used to integrate the equations for a twenty seconds simulation.

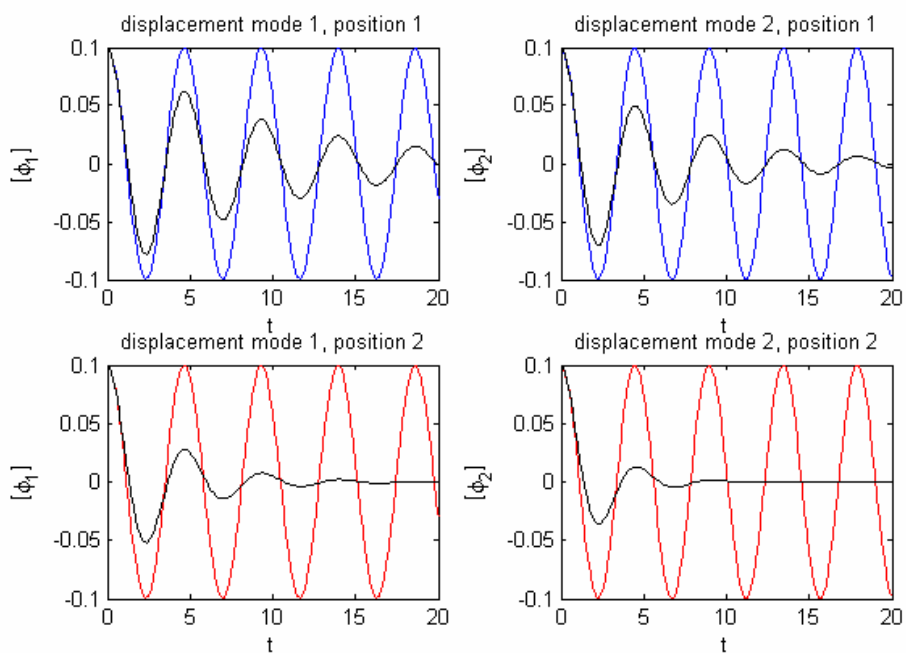


Figure 6. Deflections of first and second modes without independent modal control (blue and red) and with independent modal control (black).

It is possible observe that the modal displacement go quickly to zero, even without natural damping.

6 CONCLUSIONS AND CONSIDERATIONS

In this work we introduced an integrated design procedure for a topology optimization and structural control system. This technique uses optimal design of a controlled structure and

steady state control forces was achieved through the homogenization method and displacement feedback law. Optimal controls were applied to reduce the structural vibration within a reasonable few cycles. Active control can remove the vibration suppression from the structure effectively if it is carried out appropriately.

The simulations for the control system confirmed the effectiveness of this control technique. The numerical results indicate that combined structural topology design and optimal control can become an efficient methodology.

The present methodologies can be easily extended to other applications.

ACKNOWLEDGEMENTS

The author A. Molter acknowledge the financial support of FAPERGS (Fundação de Amparo à Pesquisa do Estado do Rio Grande do Sul) Porto Alegre - Rio Grande do Sul - Brazil, Project: 10/0091-3.

REFERENCES

- Bathe, K., *Finite Element Procedures*, Prentice-Hall, 1996.
- Bendsøe, M. P. and Kikuchi, N., Generating Optimal Topologies in Structural Design Using a Homogenization Method, *Comp. Meth. Appl. Mech. Eng.*, 71:197-224, 1988.
- Bendsøe, M. P. and Sigmund, O., Material Interpolation Schemes in Topology Optimization, *Archive of Applied Mechanics*, 69:635-654, 1999.
- Bendsøe, M. P. and Sigmund, O., *Topology Optimization—Theory, Methods and Applications*, Springer, New York, 2003.
- Bertsekas, D. P., *Dynamic Programming and Optimal Control*, Belmont: Prentice-Hall, 1995.
- Cardoso, E. L. and Fonseca, J., S., O., Complexity Control in the Topology Optimization of Continuum Structures, *Journal of the Braz. Soc. of Mech. Sci. & Eng.*, 3:293-301, 2003.
- Haftka, R.T., Gurdal, Z. and Kamat, M. P., *Elements of Structural Optimization*, Kluwer, 1990.
- Ou, J.-S. and Kikuchi, N., Integrated optimal structural and vibration control design, *Structural Optimization*, 12:209-216, 1996.
- Sigmund O., A 99 line topology optimization code written in Matlab, *Structural Multidisciplinary Optimization*, 21:120–127, 2001.
- Zhan K., Xiaoming W. and Rui W., Topology optimization of space vehicle structures considering attitude control effort, *Finite Elements in Analysis and Design*, 45:431-438, 2009.